

MAXI MED

Sistema ad Osmosi Inversa a flusso diretto con lampada UV
Direct flow Reverse Osmosis system with UV lamp



PRODUZIONE ACQUA OSMOTIZZATA
OSMOTIC WATER PRODUCTION


90 l/h ($\pm 10\%$)

AcquaFarm
Noi, la tua acqua la trattiamo bene!
Tel. +39 0832.523044 • e-mail: info@acquafarm.net • www.acquafarm.net

CARATTERISTICHE TECNICHE



Alimentazione	220 V - 50 Hz
Motore	auto raffreddamento ad aria
Pompa	300 l/h rotativa a paletta per alta pressione in acciaio inox certificata NFS
Membrane Osmotiche	n° 2 da 150 GPD TFC (Thin Film Composite)
Pre filtro	Pre filtro 10" con Polifosfati
Filtro	Filtro Quick cartridge Carbon Block - 2 ½ x 10" - 5 micron
Lampada UV	11 Watt - 1,6 gpm / 2 gpm Ø 50 x 260, 1 kg
Peso	13 kg
Dimensioni	150 x 463 x 438 mm (L-H-P)
Centralina elettronica	- sensore acustico anti-allagamento con blocco funzioni ed ingresso acqua - sensore filtri esausti - contatore litri erogati

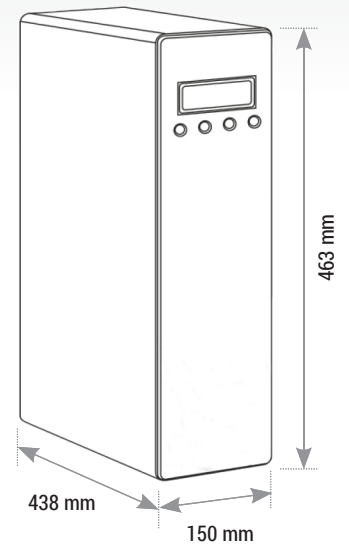

TECHNICAL FEATURES



Power supply	220 V - 50 Hz
Engine	auto air cooling
Pump	300 l/h rotary vane pump for high pressure in stainless steel, NFS certified.
Osmotic membrane	n° 2 of 150 GPD TFC (Thin Film Composite)
Pre filter	Pre filter with polyphosphates - 10"
Filter	Quick filter cartridge Carbon Block - 2 ½ x 10" - 5 micron
UV Lamp	11 Watt - 1,6 gpm / 2 gpm Ø 50 x 260, 1 kg
Weight	13 kg
Dimensions	150 x 463 x 438 mm (W-H-D)
Electronic control unit	- anti-flooding acoustic sensor with block functions for incoming water - filters exhausted sensor - counter liters

ACCESSORI IN DOTAZIONE

SUPPLIED ACCESSORIES



Kit di installazione
Installation Kit



RUBINETTO - FAUCET

ACCESSORI OPZIONALI

OPTIONAL ACCESSORIES

RUBINETTO - FAUCET

Monocomando
a 3 vie - canna bassa
Single-control
Three-way mixer tap - low cane



RUBINETTO - FAUCET

Monocomando
a 3 vie - canna alta
Single-control
Three-way mixer tap - high cane

